

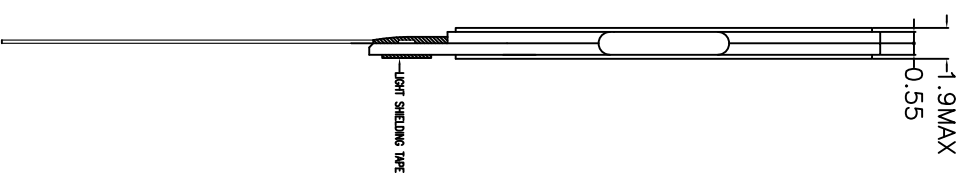


LINK-SUN (HONG KONG) ELECTRONICS LTD

Model No: LSMC12864-3

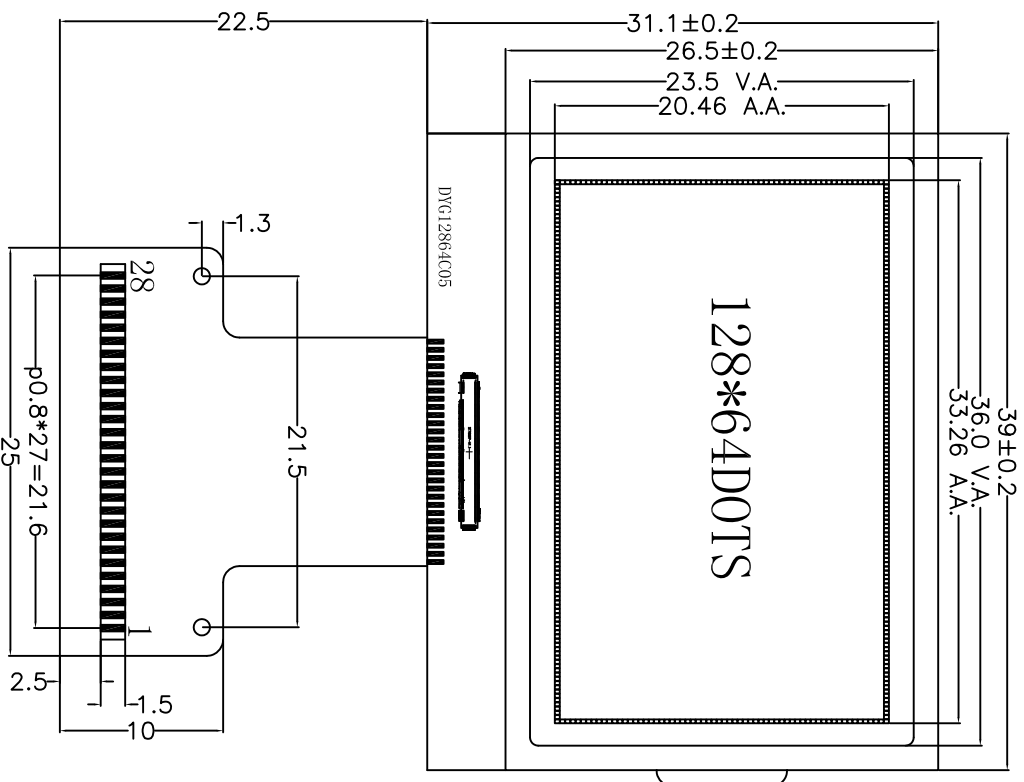

PIN ASSIGNMENT

PIN	SYMBOL	PIN	SYMBOL
1	CS1	15	YOUT
2	RES	16	CAP3P
3	A0	17	CAP1N
4	WR	18	CAP1P
5	RD	19	CAP2P
6	DO	20	CAP2N
7	D1	21	V4
8	D2	22	V3
9	D3	23	V2
10	D4	24	V1
11	D5	25	V0
12	D6	26	C86
13	D7	27	P/S
14	VSS	28	VDD

1. ALL DIMENSIONS ARE IN mm WITH 0.20 TOLERANCE (UNLESS OTHERWISE SPECIFIED)
2. VIEWING ANGLE: 6:00 O'CLOCK
3. POLARIZER TYPE: TRANSPARENTIVE, POSITIVE
4. DISPLAY TYPE: FSTN
5. OPERATING VOLTAGE: 2.4V ~ 3.3V
6. DRIVE MOKE: 1/64 DUTY, 1/9 BIAS, Vop9.0V
7. OPERATING TEMPERATURE: -10C ~ +60 °C
8. STORAGE TEMPERATURE: -20 °C ~ +70 °C
9. CONNECTOR: COG ST7565P

Tel: 86-755-86009867

Fax: 86-755-86009316

Website: www.link-sun.com

Email: linksun@link-sun.com