




# LINK-SUN (HONG KONG) ELECTRONICS LTD

Model No: LSMC9696-1

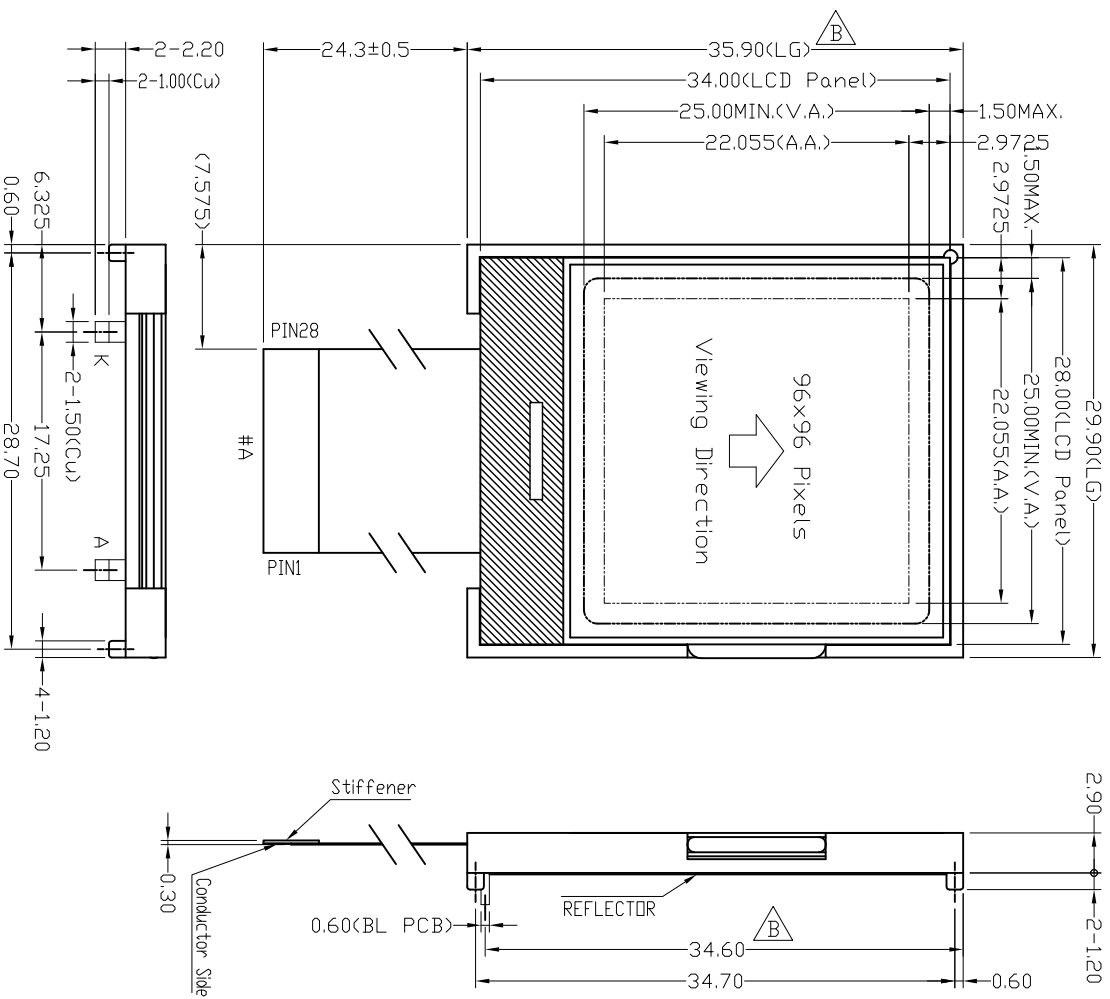


Pixels Details

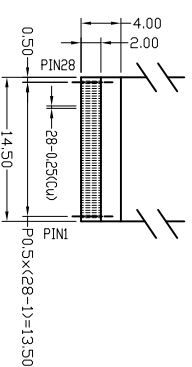

Panel wiring Details

PIN	SYMBOL	PIN	SYMBOL
1	VSS	15	DB5
2	PS0	16	DB6
3	VDD	17	DB7
4	PS1	18	VDD
5	/CS	19	VSS
6	/RES	20	VOUT
7	D/C	21	C4+
8	R/W	22	C4-
9	E	23	C3+
10	DB0	24	C3-
11	DB1	25	C2+
12	DB2	26	C2-
13	DB3	27	C1+
14	DB4	28	C1-



Backlight Circuit

Note:

- \*1. LCD Display Type : FSTN, Positive, Transflective
- \*2. Viewing Direction : 6H
- \*3. Duty : 1/96; Bias : 1/11
- \*4. Operating Voltage : 3.3V , Vop = 13.0V
- \*5. Operating Temperature : 0°C~50°C
- \*6. Storage Temperature : -10°C~60°C
- \*7. Control/Drive IC : SSD1848
- \*8. Backlight : Blue LED(I<sub>f</sub> = 15mA TYP.)