


LINK-SUN (HONG KONG) ELECTRONICS LTD


Model No: LSMT043-1A

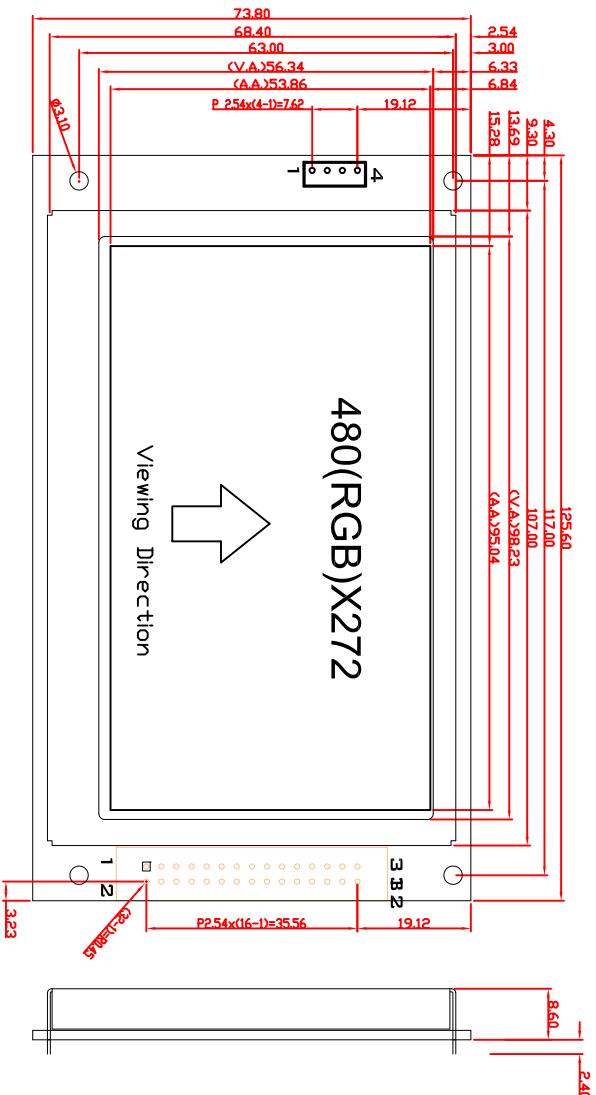

PIN	RS232/485
1	VDD
2	RxD(E)
3	TxD(D)
4	VSS

PIN	SYMBOL
1	VDD
2	VSS
3	DB0
4	DB1
5	DB2
6	DB3
7	DB4
8	DB5
9	DB6
10	DB7
11	DB8
12	DB9
13	DB10
14	DB11
15	DB12
16	DB13
17	DB14
18	DB15
19	/CS
20	RS
21	/WR
22	/RD
23	/RESET
24	BL_PW
25	TP_SO
26	TP_IRQ
27	TP_SI
28	NC
29	TP_SCK
30	NC
31	TP_CS
32	NC

- *1. LCD Display Type s-Si, TFT, Transmissive
- *2. Viewing Direction 6H
- *3. Resolution 480(RGB)(V)X272(H)
- *4. Operating Voltage 3.3V
- *5. Operating Temp -20°C~70°C
- *6. Storage Temp -30°C~80°C
- *7. Driver IC DTAS180A
- *8. Luminance 5000 cd/m²
- *9. Interface 8/16Bits_8080



Tel:86-755-86009867

Fax:86-755-86009316

Website:www.link-sun.com

Email:linksun@link-sun.com